


Attachments:

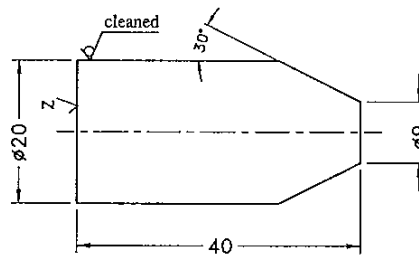

$$\sqrt{\text{cleaned}} \left(z / \sqrt{\text{lathed}} = \sqrt{Rz 100} \right)$$

Uncertain tolerances according to DIN ISO 2768-m

25....2000 KVA

Substituted of: G.Z-001

1	1	Guide Bolt	St.37k	Rd.20	0.086
	-	DIN 668	DIN 1652		
Qt.	Item No.	Description	Material	Dimension	Mass.
	Index	Identity No.	Standard		Kg
Index	Mod.No.	Date	Modifications	Signature	Title:
					Guide Bolt
					Ordered by:
Tolerance:		Group:	Applied by:	Drawing Identification:	
Scale: ---			<i>Jozi</i>	I T R I - - R 1 1	
			Check by:	Drawing No.:	
			<i>Asadi</i>	N D O A 0 1 - 0 1 7 - -	
			Approved by:	Date:	Page.Count No.:
				1389/08/03	Page No.:

dt شرکت توزیع ایران ترانسفورماتورها
TOZIE IRAN TRANSFO ZANGAN CO.